

ES7.5 - "Steam Master" Heavy Duty Commercial Steam Generator's Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES7.5
Dimensions : 27"L x 9"W x 14"H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 7.5 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½" Copper pipe, a "Y" strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required

Operational Water Supply Line: ¾" Copper tube. This line must
have a sediment filter and a Shut Off Valve



2 Steam-Out Pipes
1" Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1" Outlet Pipe

ES7.5 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATION
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series - ES7.5
Output	7.5 KW
Room Size	Up to 375 cubic feet
Electrical	240V/208V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self-cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2-in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9” W x 14”H
Shipping / Operational Weight	Approximately 80 lbs / 100 lbs

ES9 - “Steam Master” Heavy Duty Commercial Steam Generator’s Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES9
Dimensions : 27”L x 9”W x 19”H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 9 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½” Copper pipe, a “Y” strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required


Operational Water Supply Line: ¼” Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1” Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1” Outlet Pipe

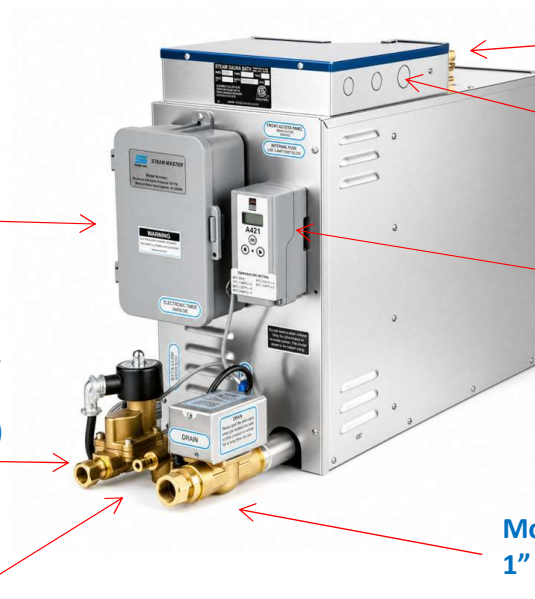

ES9 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES9
Output	9 KW
Room Size	Up to 500 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2–in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 lines of ½” c/w compression connector, branch for 3/4” outlet for safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 90 lbs / 110 lbs

ES12 - “Steam Master” Heavy Duty Commercial Steam Generator’s Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES12
Dimensions : 27”L x 9”W x 19”H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 12 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½” Copper pipe, a “Y” strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required

Operational Water Supply Line: ¼” Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1” Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1” Outlet Pipe



ES12 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES12
Output	12 KW
Room Size	Up to 750 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2–in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 90 lbs / 110 lbs

ES15 - “Steam Master” Heavy Duty Commercial Steam Generator’s Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES15
Dimensions : 27”L x 9”W x 19”H
Enclosure : Stainless Steel

Exclusive Features:

- * A Self-Cleaning System
- * Stand-By Binary System
- * 2-in-1 Hands free system

Output : 15 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½” Copper pipe, a “Y” strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required

Operational Water Supply Line: ¼” Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1” Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1” Outlet Pipe



30 min-Timer (ET4 Timer)



ES15 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES15
Output	15 KW
Room Size	Up to 1000 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2-in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 95 lbs / 115 lbs

ES18 - "Steam Master" Heavy Duty Commercial Steam Generator's Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES18
Dimensions : 27"L x 9"W x 19"H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 18 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½" Copper pipe, a "Y" strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required


Operational Water Supply Line: ¾" Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1" Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1" Outlet Pipe

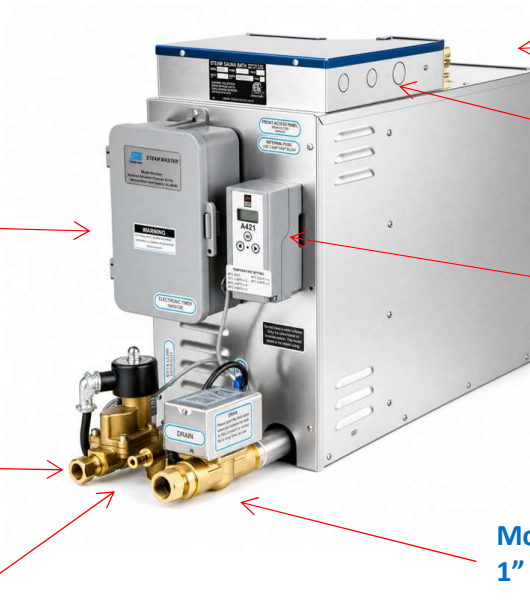

ES18 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES18
Output	18 KW
Room Size	Up to 1250 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2–in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 95 lbs / 115 lbs

ES21 - “Steam Master” Heavy Duty Commercial Steam Generator’s Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES21
Dimensions : 27”L x 9”W x 19”H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 21 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½” Copper pipe, a “Y” strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required


Operational Water Supply Line: ¾” Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1” Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1” Outlet Pipe

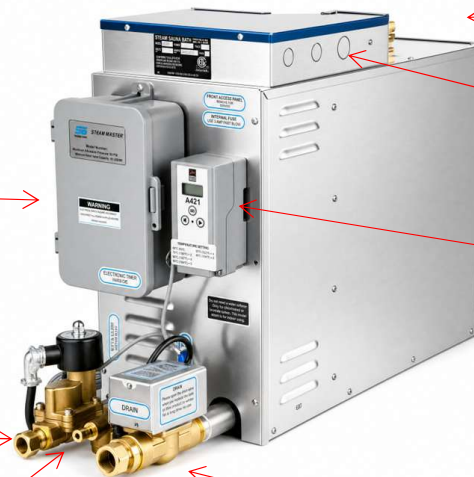

ES21 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES21
Output	21 KW
Room Size	Up to 1500 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2-in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 95 lbs / 115 lbs

ES24 - "Steam Master" Heavy Duty Commercial Steam Generator's Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES24
Dimensions : 27"L x 9"W x 19"H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 24 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½" Copper pipe, a "Y" strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required

Operational Water Supply Line: ¼" Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1" Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1" Outlet Pipe



ES24 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES24
Output	24 KW
Room Size	Up to 1750 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2–in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 95 lbs / 115 lbs

ES27 - "Steam Master" Heavy Duty Commercial Steam Generator's Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES27
Dimensions : 27"L x 9"W x 19"H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 27 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½" Copper pipe, a "Y" strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required


Operational Water Supply Line: ¾" Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1" Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1" Outlet Pipe

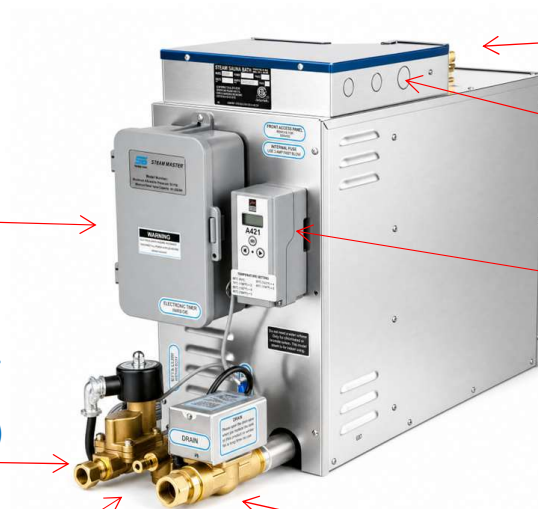

ES27 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES27
Output	27 KW
Room Size	Up to 1875 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2-in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 100 lbs / 120 lbs

ES30 - "Steam Master" Heavy Duty Commercial Steam Generator's Shop Drawing

Brand Name : Steam Master
Model : Executive Series – ES30
Dimensions : 27"L x 9"W x 19"H
Enclosure : Stainless Steel
Exclusive Features:
* A Self-Cleaning System
* Stand-By Binary System
* 2-in-1 Hands free system

Output : 30 KW
Electrical : 240V/208V/480V/600V;
Single or 3 Phase

24 Hour / 7 Day Digital Electronic
Timer or On/Off Switch

Automatic Power Clean Supply Line -
½" Copper pipe, a "Y" strainer, a
water pressure reducing valve (50PSI)
& a Shut Off Valve is required


Operational Water Supply Line: ¾" Copper tube. This line must
have a sediment filter and a Shut Off Valve

2 Steam-Out Pipes
1" Copper to each room

Power Junction box for
Power Supply Connection

LED Digital Thermostat and
Electronic Sensor

Motorized Gravity Drain Valve
1" Outlet Pipe

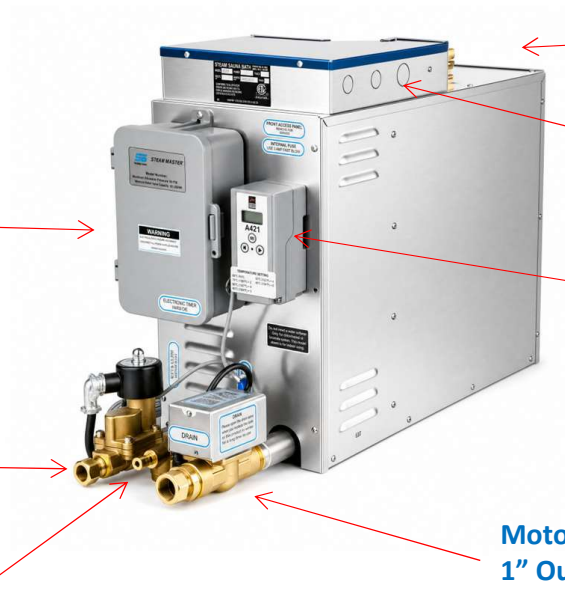

ES30 – “Steam Master” Heavy Duty Commercial Steam Generator’s Specifications

NAME	SPECIFICATIONS
Manufacturer	STEAM SAUNA INC.
Brand Name	Steam Master
Model	Executive Series – ES30
Output	30 KW
Room Size	Up to 2000 cubic feet
Electrical	240V/380V/480V/600V; Single Phase or 3 Phase
Operating Pressure	Atmospheric
24 Hour /7 Day Digital Timer	Factory Mounted, 20 programs setting for a day and a week
Thermostat	Electronic sensor wire connected with LED Digital Thermostat
Electronic Control Module	Contains a digital P.C. board that controls the multi-stage heating module, MIW water level sensing and self cleaning power flush system, programmed with an advanced technology digital microprocessor
Steam Control System	2-in-1 hands free system, standby binary system with 30-min E-touch Timer
Heating Elements	Low density industrial in-colony heating elements
Operational Water Feed	¼” inlet comes with compression connector for ¼” tube
Power Flush Valve	one - ½” inlet comes with compression connector for ½” Copper pipe.
Motorized Drain	Factory installed 1” motorized valve, connected on 1” stainless steel pipe comes with compression connector, run to the floor drain
Steam Outlets	2 outlets, comes with ¾” compression connector, branches for ¾” safety relief valve
Dimensions	27”L x 9”W x 19”H
Shipping/Operational Weight	Approximately 100 lbs / 120 lbs